

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number  
**WO 2004/010046 A1**

(51) International Patent Classification<sup>7</sup>: **F17C 13/04**,  
F16K 1/30

(21) International Application Number:  
PCT/EP2003/006526

(22) International Filing Date: 20 June 2003 (20.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02015978.6 18 July 2002 (18.07.2002) EP

(71) Applicant (for all designated States except US): **SODA-CLUB (CO2) SA** [CH/CH]; Neugasse 14, CH-6300 Zug (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FUNT, Mark**

[IL/IL]; Rivka Gover Street 3, 44471 Kfar Saba (IL). **BEN-SIMON, Michel** [IL/IL]; Dr. Reuven Hecht 38 St. Ramot, 84944 Beer Sheva (IL). **LEVED, Gregory** [IL/IL]; Harya Street 15, 76209 Rehovot (IL). **COHEN, Avi** [IL/IL]; Hadishon Street 8, 96956 Jerusalem (IL).


(74) Agents: **MÜLLER, Christoph** et al.; Hepp, Wenger & Ryffel AG, Friedtalweg 5, CH-9500 Wil (CH).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: A VALVE FOR CLOSING A CONTAINER, CONTAINER AND A SYSTEM AND METHOD FOR FILLING A CONTAINER

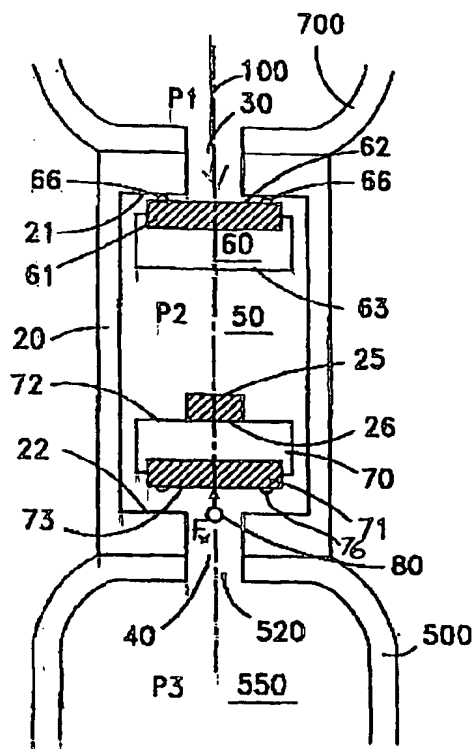

(57) **Abstract:** A valve for closing a container and for enabling the container to be filled has a housing (20) with an inlet port (30) and an outlet port (40). A closing member (60) is provided for sealingly closing the valve at the inlet port (30). At least one valve member (70) is provided for controlling fluid communication between the inlet port (30) and the outlet port (40). The valve member only allows fluid communication when it is in a first position. The valve member (70) is designed in such a way that it is brought into and maintained in said first position only if a predetermined filling condition is achieved. The filling condition is typically achieved, when the filling pressure of a system for filling the container (50) is initially below a first predetermined or predetermined threshold value.

WO 2004/010046 A1